


SATCUBE



- **Lightest terminal in its class**
- **Highly innovative compact design**
- **Designed to fit in a backpack for ease of transport**
- **User friendly GUI enables assisted setup in less than five minutes**

ANTENNA	
Size	18.5 x 11.8 (inches)
Acquisition	Assisted manual
Elevation	0° to +90°
RF PERFORMANCE	
	Ku-Band
Transmit (GHz)	13.75 to 14.5
Receive (GHz)	10.95 to 12.75
Polarization	Linear
EIRP (dBW)	46.0 dBW
G/T (dB/K)	9.0 dB/K
MODEM INTEGRATION	
iDirect IQ200	
INTERFACES	
Gigabit Ethernet	2 ports
Wi-Fi	IEEE 802.11 b/g
GPS	Internal; manual entry available
User Interface	Built-in color display; Web interface
POWER (with optional AC/DC supply)	
AC	100 – 240 VAC, 47 – 63 Hz, 150 W (With external AC to DC Adapter)
DC	10-32 VDC, 130 W
Battery (airline compliant)	3 hours transmit time (three batteries)
MECHANICAL	
Stowed Dimensions	18.5 x 11.8 x 2.2 (inches)
Terminal Weight	17.6 lbs
ENVIRONMENTAL	
Temperature	-20°C to +50°C
Dust/Water Resistance	IP65

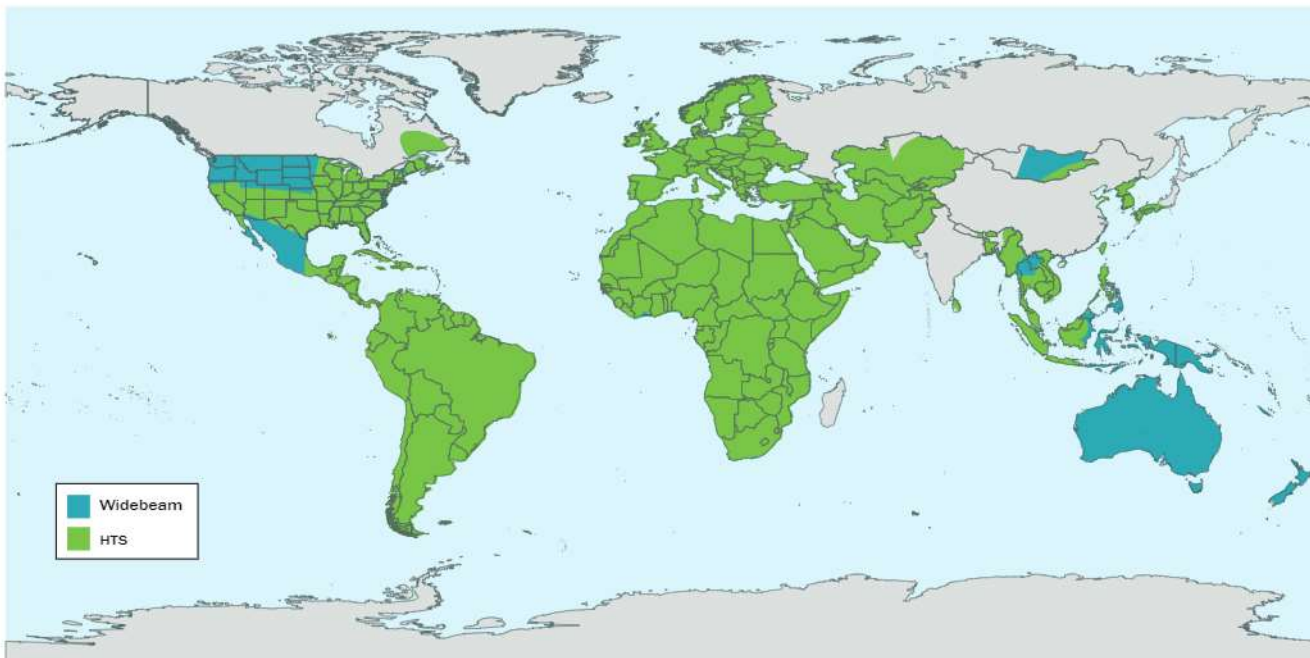

Pay-AS-You-Go tplans are perfect for customers with sporadic usage



Monthly fixed data plans enable a predictable cost structure



Unlimited plans are designed for high usage requirements



Shared data plans enable up to five terminals to share a single subscription delivering greater flexibility of use

